

DEB-1200R

Name of Each Part



Product configuration package



Power safety device



Memory Card Readers



Micro SD CARD



Power supply, AV cable



Manual

Specification DEB-1200R

| | | | |
|---------|-----------------------|-------------------|--|
| FEATURE | CAMERA | CAMERA | Single(Front) |
| | | SENSOR | CMOS |
| | | SAENSITIVITY | 0.3LUX(Front), |
| | | PIXELS | 2.0Mega Pixels(Front) |
| | | Viewing Angle | 120 degree |
| | Recording | Resolution | 640X480 |
| | | Frame | Max 30f/s |
| | | FORMAT | MPEG4 |
| | | Recording Time | 1Minutes/Regular, +10Sec/Regular+Event |
| | G-Sensor | Shock Sensor | 3Dimension Shock Sensor |
| | MEDIA | SD CARD | Micro SD/SDHC 2G~16G Support |
| | Audio | VOICE | Built-in Microphone |
| | LED | 3 Color | 2LED(Regular,Event,Mic On/Off) |
| Viewer | | PC Viewer Program | |
| GPS | | Built in | |
| FIGURE | Dimension | 59.8X95X25.1 | |
| | weight | 110g | |
| | Color | Black | |
| | Power | DC12V~DC24V | |
| | CASE Material | PC | |
| | Operating Temperature | -30°C~+90°C | |
| | Keeping Temperature | +30°C~+90°C | |


Customer Support



Made in korea
tel :82-2-2694-9581

Mobil :82-10-2247-0400
<http://www.goodbell.koreasme.com>

▶ **SECURROAD** IBM-2100K(2 channel)

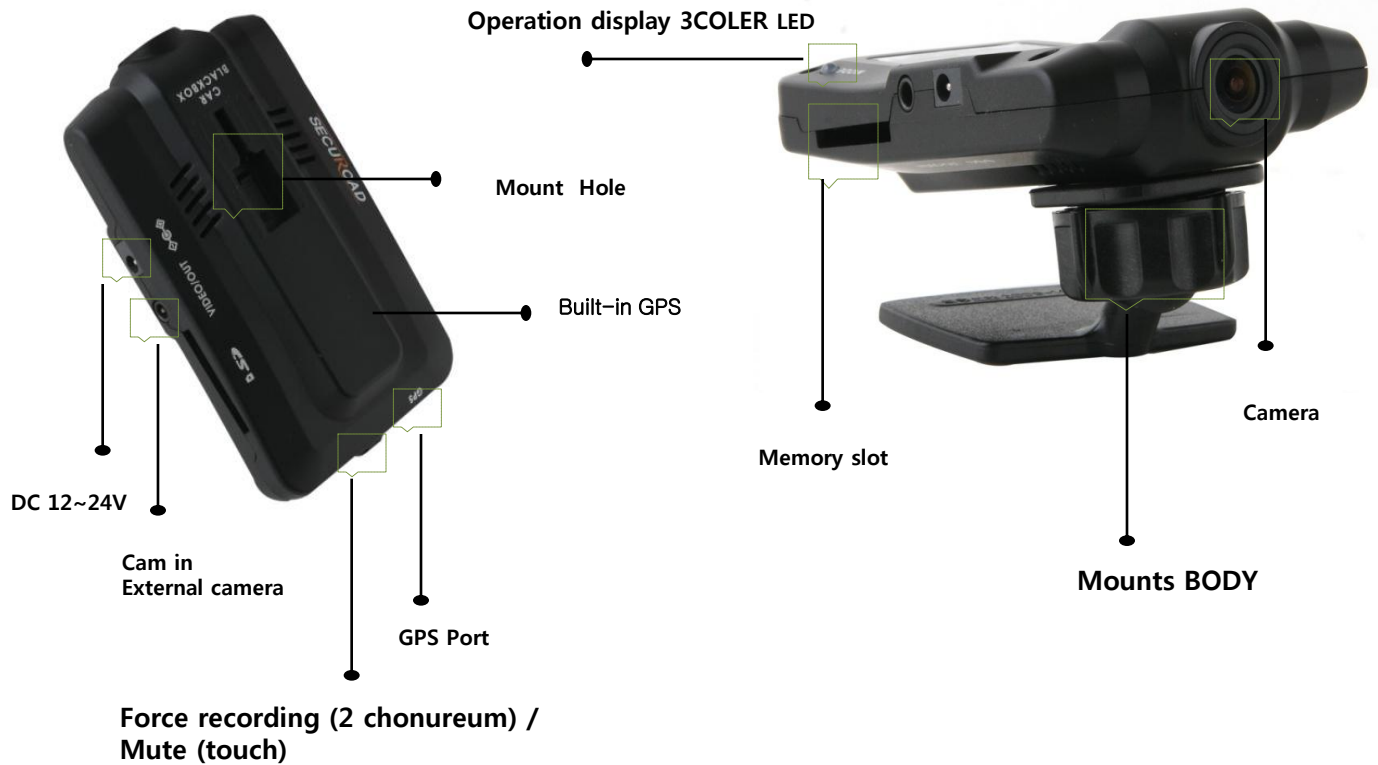

Product configuration package



Power safety device



External camera



SD Memory Card Readers



car adapter



Mounts



Manual

► Product Specifications : SECU ROAD IBM-2100K(2 channel)

| | | | |
|----------------------|---------------------------|--|--|
| Configuration | Camera | Camera | Front, rear 2 |
| | | Lens system | CMOS |
| | | Illumination lens | 0.3LUX (front), 0.1LUX (rear) |
| | | Pixels | 1.3-megapixel |
| | | Angle of View | 120 |
| | Recording | Resolution | 640X480 |
| | | Frame | Max 1 channel 30f / s, 2 channel 10f / s |
| | | Compression | MPEG4 |
| | | Recording time | Always -1 minute, the event - always second to +10 |
| | G Sensor | Shock sensor | Built-in three-dimensional shock sensor (sudden braking, shocks, etc. works) |
| | Storage Media | SD card | SD / SDHC 2G ~ 16G support |
| | Audio | Audio | Built-in microphone |
| | LED | Lamp type | 1LED (permanent recording, events, and a microphone On / Off) |
| Playback viewer | Only programs | Provide dedicated viewer, playable on GOM | |
| GPS | 4-pole type | Built-in GPS | |
| Appearance | Size | 59.8X95X25.1 | |
| | Weight | 110g | |
| | Color | Black | |
| | Power | DC12V~DC24V | |
| | The main material | PC | |
| | The operating temperature | Temperature 30 degrees to 90 degrees ambient temperature | |
| | Storage | Temperature 30 degrees to 90 degrees ambient temperature | |